


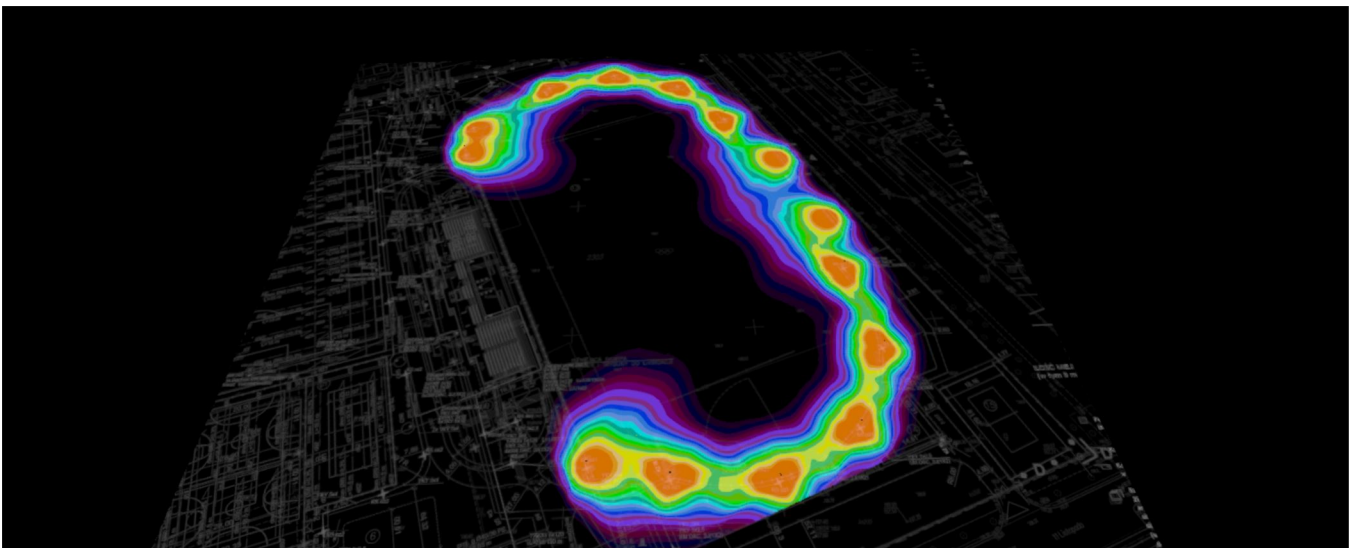


Bieżnia, Białobrzegi

Obrazy

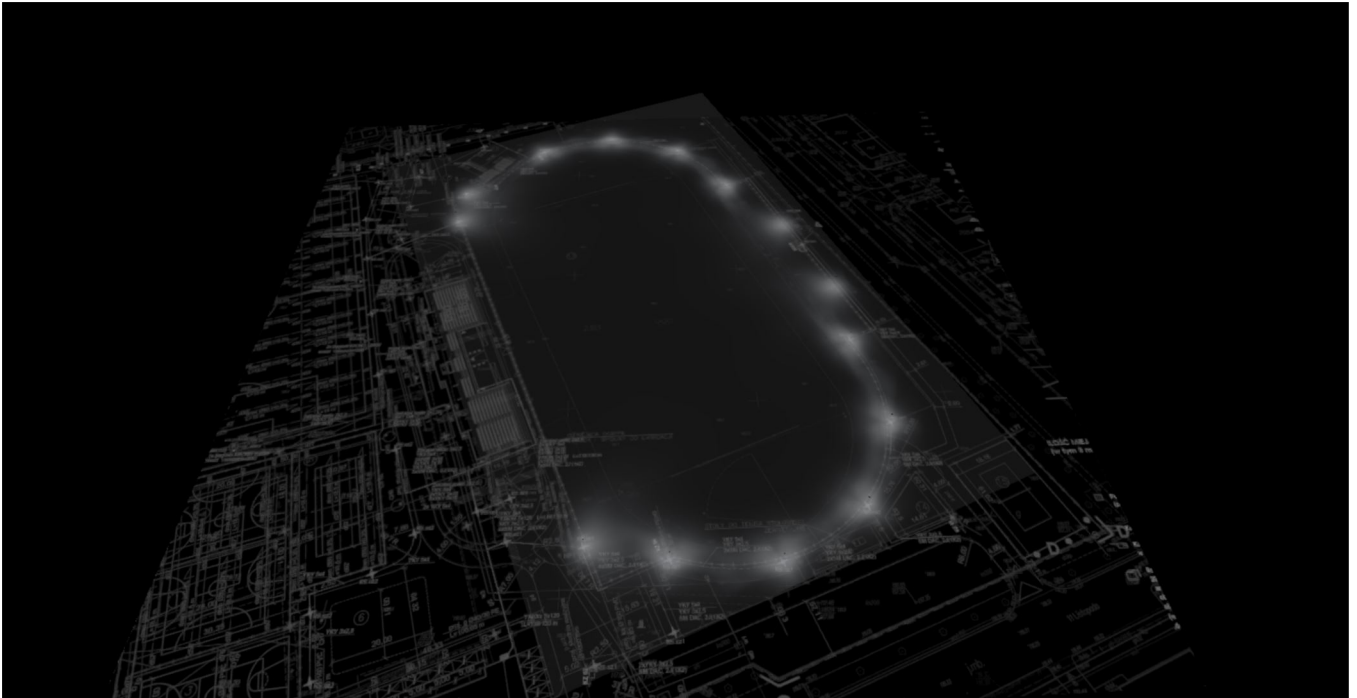

Plan sytuacyjny oprav

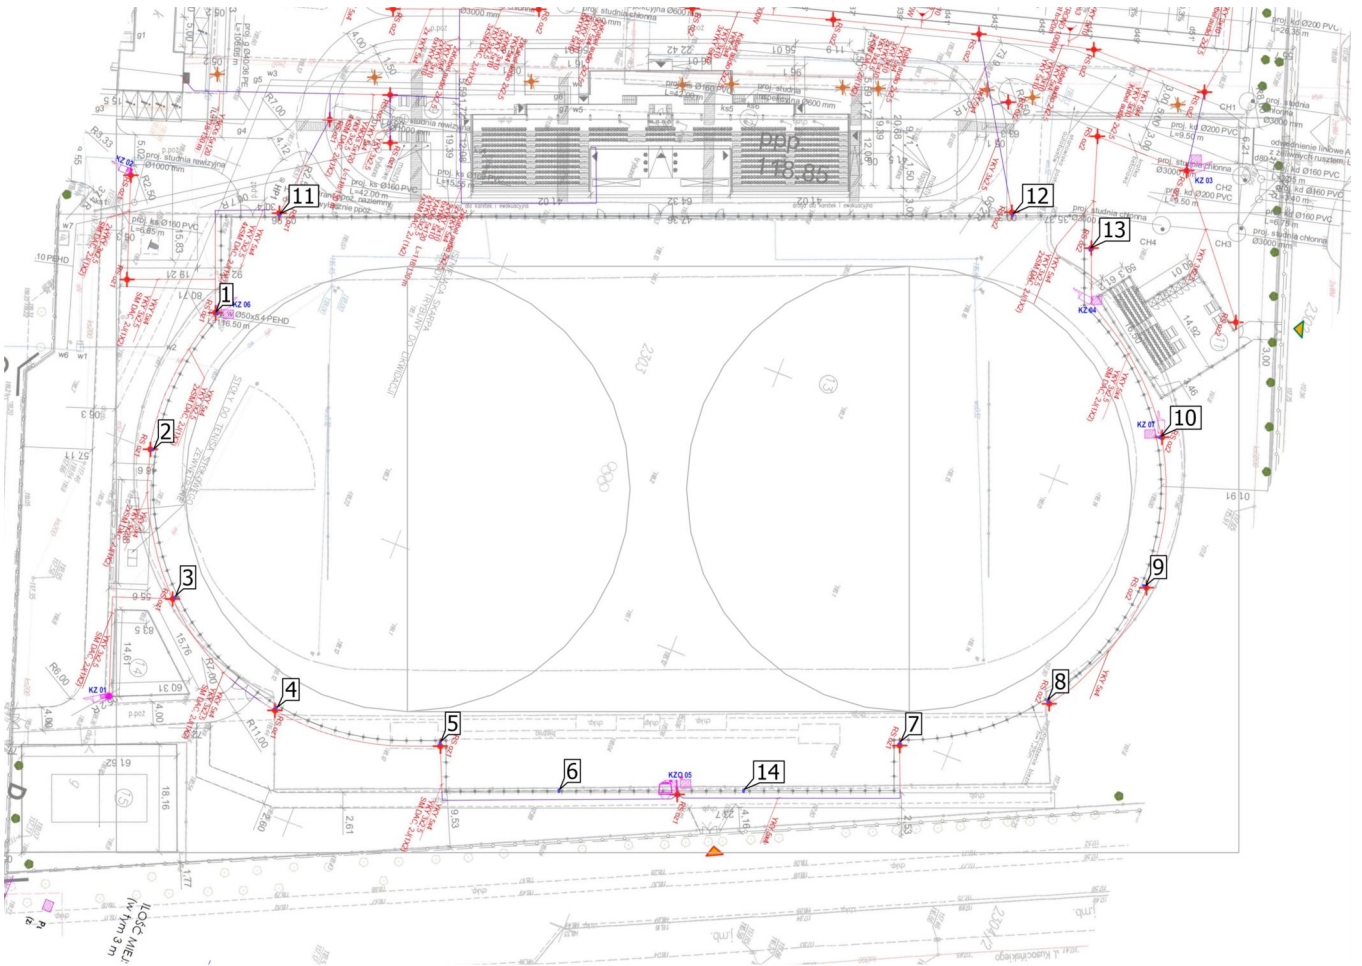

Plan sytuacyjny opraw

Schröder - - IZYLUM 1 / 5345 / 20 LEDs 700mA NW 740 45.5W / Light Exhauster / 474702
1x 20 LEDs 700mA NW 740




X	Y	Wysokość montażu	Obrót obudowy	MF	Oprawa
-77.760 m	29.171 m	4.000 m	5.0° / 0.0° / -126.0°	0.80	1
-88.671 m	6.086 m	4.000 m	5.0° / 0.0° / -91.0°	0.80	2
-84.862 m	-18.826 m	4.000 m	5.0° / 0.0° / -65.0°	0.80	3
-67.719 m	-37.529 m	4.000 m	5.0° / 0.0° / -34.0°	0.80	4
-39.978 m	-43.470 m	4.000 m	0.0° / 0.0° / 0.0°	0.80	5
37.453 m	-43.460 m	4.000 m	0.0° / 0.0° / 0.0°	0.80	7
62.523 m	-36.470 m	4.000 m	5.0° / 0.0° / 37.0°	0.80	8
78.749 m	-16.891 m	4.000 m	5.0° / 0.0° / 67.0°	0.80	9
81.441 m	8.251 m	4.000 m	5.0° / 0.0° / 104.0°	0.80	10

Schröder - - IZYLUM 1 / 5393 / 20 LEDs 700mA NW 740 45.5W / Light Exhauster - [O-R] / 501322
1x 20 LEDs 700mA NW 740

X	Y	Wysokość montażu	Obrót obudowy	MF	Oprawa
-20.000 m	-51.560 m	4.000 m	15.0° / 0.0° / 0.0°	0.80	6
-67.047 m	45.851 m	4.000 m	15.0° / 0.0° / -180.0°	0.80	11
56.400 m	45.851 m	4.000 m	15.0° / 0.0° / -180.0°	0.80	12
69.634 m	39.958 m	4.000 m	15.0° / 0.0° / 142.0°	0.80	13
11.100 m	-51.560 m	4.000 m	15.0° / 0.0° / 0.0°	0.80	14

(Scena świetlna 1)

Bieżnia

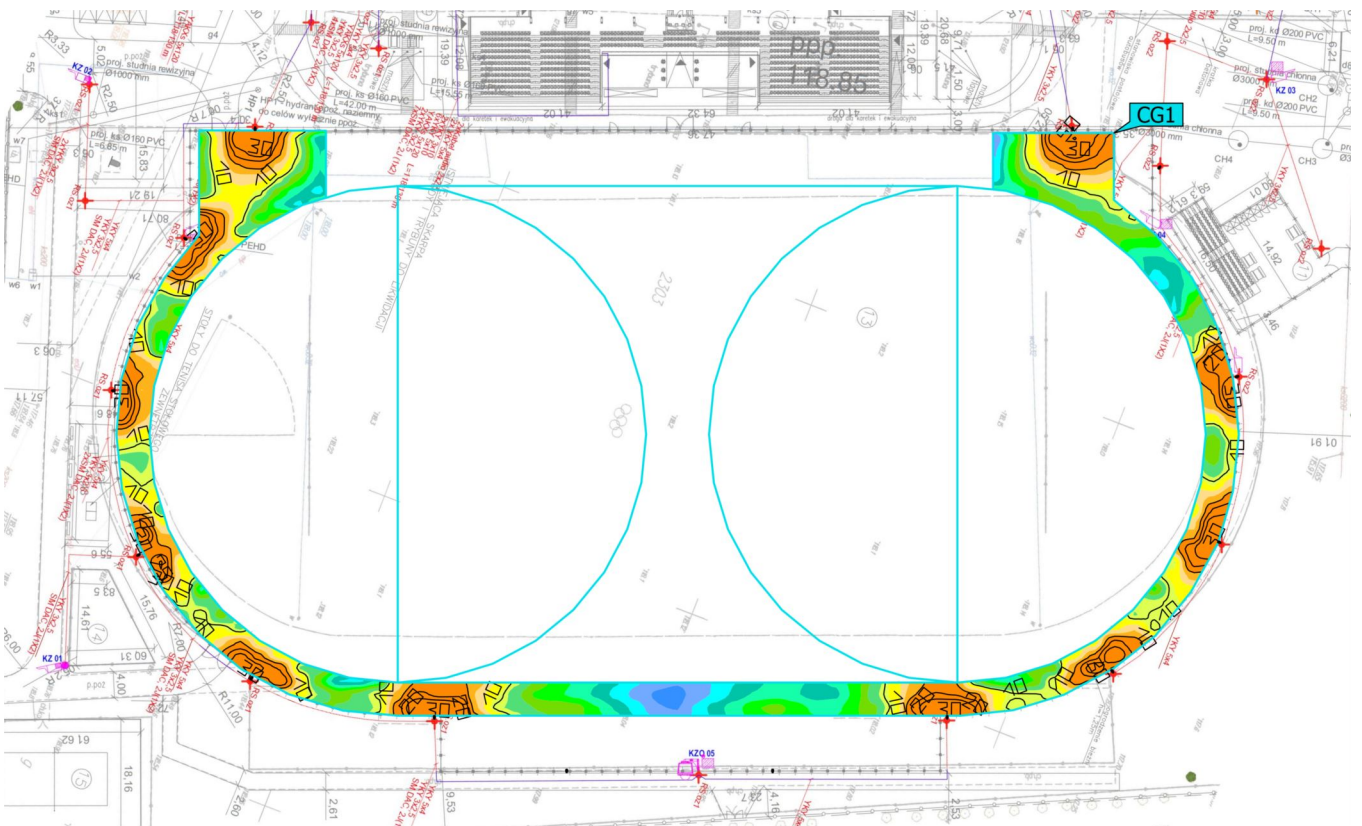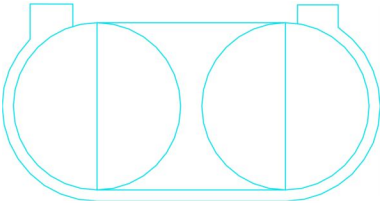

Właściwości	\bar{E}	$E_{min.}$	E_{maks}	g_1	g_2	Indeks
Bieżnia Prostopadłe natężenia oświetlenia Wysokość: 0.000 m	13.8 lx	2.10 lx	50.8 lx	0.15	0.041	CG1